

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
**WO 2004/006669 A1**

(51) International Patent Classification<sup>7</sup>: **A01N 25/20**

(21) International Application Number:  
PCT/GB2003/002938

(22) International Filing Date: 8 July 2003 (08.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0216290.7 15 July 2002 (15.07.2002) GB

(71) Applicant (*for all designated States except MG, US*):  
**RECKITT BENCKISER (AUSTRALIA) PTY LIMITED** [AU/AU]; 44 Wharf Road, West Ryde, New South Wales 2114 (AU).

(71) Applicant (*for MG only*): **RECKITT BENCKISER (UK) LIMITED** [GB/GB]; 103-105 Bath Road, Slough, Berkshire SL1 3UH (GB).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **CRAVEN, Daniel, Jeremy** [AU/AU]; Reckitt Benckiser (Australia) Pty Limited, 44 Wharf Road, West Ryde, New South Wales 2114 (AU). **VERARDO, Guido, Sante, Domenico** [AU/AU]; 40 Bradman Road, Menai, New South Wales 2234 (AU).

(74) Agents: **MCKNIGHT, John, Crawford et al.**; Reckitt Benckiser plc, Dansom Lane, Hull HU8 7DS (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*
- *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **INSECTICIDAL COILS**

(57) Abstract: A combustible pesticidal product is disclosed which comprises a structural element formed from a pulp of organic fibrous material, cellulose fibres, wood free fibres or mixtures thereof, the product including one or more pesticides which product on combustion emanates the pesticide into the atmosphere. Typically the combustible product will be a mosquito coil which has been impregnated with one or more insecticides effective against mosquitoes. On combustion of the coil, insecticide is emanated into the atmosphere for a period of 7-8 hours.

WO 2004/006669 A1

## Insecticidal Coils

### Technical Field

This invention relates to moulded combustible products that emanate a pesticide  
5 into the atmosphere on combustion and more particularly to such products that undergo  
combustion for a prolonged period thereby providing an extended time period of  
pesticidal activity.

### Background Art

10 The kind of products to which this invention relates are commonly referred to as  
"mosquito coils". Such coils are characterised by being formed from a combustible  
material which is shaped into a circular helix. Included in the combustible material are  
one or more pesticides, which in the case of products active against mosquitoes will be  
insecticides. As the product burns, the insecticides are emanated into the atmosphere  
15 by virtue of their volatility. Ideally, such coils will provide an effective level of  
insecticide in the atmosphere for an appropriate time period.

Typically, mosquito coils are used in environments where persons sleep and are  
therefore unable to destroy mosquitoes before being bitten. Another usage is  
environments where infants or others incapable or having a limited ability of destroying  
20 attacking mosquitoes are placed.

It will be readily appreciated that mosquitoes are vectors for a number of  
particularly persistent and often life-threatening or at least debilitating diseases. Most  
significant among these diseases is malaria. It is therefore highly desirable to prevent  
mosquito bites as a means of preventing the contracting of such diseases.

25 Mosquitoes are particularly prevalent in tropical and sub-tropical regions. Many  
of these regions include countries with relatively low per capita incomes. It is therefore  
desirable to be able to provide pesticidal products that are highly cost effective. In  
general terms, traditional mosquito coils fulfil this role. They are relatively easy to  
form and include low cost ingredients. As emanation of the insecticide is only  
30 dependant on combustion of the coil, the only source of energy required is sufficient  
heat to initially ignite a coil to cause it to combust. However, one feature that is

lacking in such coils is the ability to reliably provide a period of sufficient insecticidal activity while a person sleeps overnight. Typically coils should provide up to about 8 hours of insecticidal coverage. However, due to breakage, it is not uncommon for a coil to burn for a significantly shorter period of time. This requires that a person  
5 sleeping awake and recognise that the coil is not burning, then carefully relight the unbroken portion whilst ensuring that it is intact and correctly mounted. Such a requirement is not conducive to maintaining an effective overnight coverage against mosquito bites.

At this point it is worth noting that traditional mosquito coils are formed as  
10 planar circular helices in a moulding or other shaping process. At the terminal end of the coil, approximately in the centre, is a small aperture which is used to locate the mosquito coil on an upstanding pin. The upstanding pin usually projects out of a dish or tray which is used to collect the ashes of the combusted coil. Locating of the coil on the pin results in the coil separating out so as to form a continuous spiral with the  
15 beginning of the coil, which is where combustion commences, at a point lower than the terminal end which sits on the locating pin. In this way the continuous spiral forms a track which combusts from the outer beginning end to the mounted terminal end.

It should be appreciated that mosquito coils may also be formed as double circular helices. In these structures, the helices are formed co-terminously. However,  
20 prior to use, each helix must be separated out. One important reason for producing coils in this way is that of economical use of available material as well as ease of formation in manufacture.

As mentioned above, typically mosquito coils are subject to breakage. This arises out of the fact that they are quite brittle and during manufacture, rather than  
25 being produced in a planar form, coils may warp to assume a wavy or convex conformation. In some cases, a free end or tip of the coil may curl upwardly. It is therefore well recognised that breakage may occur during manufacture, packaging, transport and in use by a consumer. In this latter case, it is important that a consumer exercise considerable care in both opening and mounting a coil. More especially in the  
30 case of double helical coils, care must be taken in separating out each coil so as to

avoid breakage. Again it must be emphasised that any breakage of a coil effectively results in a coil being shortened both in length and most significantly, burn time.

Another known method of making mosquito coils is by treating thick pieces of cardboard with an insecticide. The cardboard may be made of layers of thinner sheets  
5 which are stacked on top of one another until the desired thickness is achieved. The multi-layered cardboard is then cut to the required shape of the coil. While this method reduces the breakage of the coil, the cutting of the thick cardboard results in the damage and breakage of the cutting knives. The costs associated with the regular replacement of the knives is significant.

10 Whilst recognising the short comings of traditional mosquito coils, the present inventors have sought to provide an improved coil which is capable of providing a prolonged effective period of insecticidal coverage and is produced in a manner resulting in a cost effective product relative to the traditional coil.

This has been achieved by recognising that rather than forming the coils as  
15 planar helices which need to be handled with some care, the coils are moulded to a form which significantly reduces the chance of breakage and does not involve cutting thick cardboard.

#### Disclosure of Invention

Accordingly, in a first aspect the present invention consists in a combustible  
20 pesticidal product comprising a structural element formed of a vacuum moulded pulp of organic fibrous material, cellulose fibres, wood free fibres, or mixtures thereof, the product including one or more pesticides,  
which product on combustion emanates the pesticide into the atmosphere.

In a second aspect, the present invention consists in a method of making a  
25 combustible pesticidal product comprising the steps of:

forming a pulp of organic fibrous material, cellulose fibres, wood free fibres, or mixtures thereof,

the addition of one or more pesticides, and

moulding the product by vacuum moulding

30 to form a combustible pesticidal product.

Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element, integer or step, or group of elements, integers or steps, but not the exclusion of any other element, integer or step, or group of elements, integers or steps.

5 For the purposes of describing this invention, reference will be made to mosquito coils, although it must be appreciated that this invention is not so-limited.

In a preferred embodiment, the product is formed by moulding a pulp into the desired shape. Typically the shape will be helical although not necessarily circular.

The pulp is moulded into the shape of a mosquito coil by vacuum moulding,  
10 preferably thermoforming.

Vacuum moulding involves feeding a pulp product into a hydropulper to form a solution, a mould covered by a mesh screen being lowered into the solution, and a vacuum being applied to the mould. The use of the vacuum causes fibres to be drawn to the surface of the mould, being a single immersion, or if necessary a number of  
15 immersions, and once a sufficient fibre depth is drawn onto the mould the mould is removed from the solution, the vacuum then being used to dewater the pulp. Vacuum moulding can be undertaken at any pressure less than atmospheric pressure however it is more preferable that the pressure is 0-20kPa (abs) to reduce processing times. These pressures are absolute, ie. the true total pressure of the system that is causing the pulp  
20 to form on the mesh. The maximum vacuum achievable is 0kPa (abs), whilst atmospheric pressure is 101.3 kPa (at sea level and 0°C). The product may then be transferred from the mould to another mould, with or without compression and dried either in or out of the mould. Methods of drying include but are not limited to direct heat, microwaves or exposure to sunlight. The product is then pressed to the required  
25 density either within the mould or after the product has been transferred from the mould.

The thermoforming process is similar to vacuum moulding in that a mould covered by a mesh screen is immersed into a pulp solution and a vacuum is applied to the mould. After a sufficient fibre depth has been drawn onto the mould it is removed  
30 from the solution. This mould is then pressed either mechanically or pneumatically or a combination thereof, between a corresponding transfer mould to remove water. This

transfer mould may be heated and may also have a vacuum applied to it to aid dewatering. The product may then be held in this transfer mould and moved to another mould for further processing. Further processing may include compression between heated or unheated moulds. Transference of the product from mould to mould can be  
5 achieved using compressed air and vacuums. The product is dried in the mould using pressures of between 50 to 1500kPa, preferably 200 to 600kPa, most preferably 400kPa and at a temperature of between 80 to 400°C, preferably 250°C. The product may undergo further processing, for example, stamping or pressing to improve the product qualities.

10 There are also many permutations for forming the product using both vacuum moulding and thermoforming techniques in different processing orders. Some of these permutations could include;

- pressing and heating the product at the same time or separately,
- pressing the product after or before drying,
- 15 partially drying the product then pressing, preferably followed by further drying, using heated or unheated moulds,
- drying the product either in or out of the mould,
- using mechanical or pneumatic means to press and transfer products,
- using vacuums and/or compressed air being heated or unheated to aid in  
20 dewatering.

To aid transfer of the pulp product from the mould, the sides of the mould may be slightly tapered. An angle of 0-30 degrees, preferably 5-10 degrees is commonly used and is termed the 'draft angle'.

The advantages of thermoforming over most other methods of processing  
25 include high output rates, good quality physical properties in finished parts, namely a smooth surface finish on both sides of the product, density control, and thickness control, and less space and energy requirements as there is no need for a drying oven.

The pulp can be manufactured from readily available and inexpensive combustible organic fibrous materials, cellulose fibres and wood free fibres. Examples,  
30 without limitation include waste paper and cardboard, old newspaper, kraft pulp, coconut powder, straw, bagasse, bamboo, cane, straw, grasses, weeds, tea leaves,

charcoal powder, sawdust, cotton, cloths, rags, and husks of materials such as rice, wheat and coconuts. Preferably, old newspaper is used.

Whilst this invention is applicable to a variety of pesticidal substances, the preferred form relates to the use of insecticides, particularly insecticides that are  
5 effective against mosquitoes.

The insecticides used in this invention comprise all residual insecticides, including non-microencapsulated insecticides, microencapsulated insecticides as well as mixtures of non-microencapsulated and microencapsulated insecticides.

It is preferred that the one or more insecticides comprise substances which are  
10 toxic to mosquitoes. Without limitation, these include esbiothrin, d-allethrin, prallethrin, transfluthrin, bioallethrin, esbioallethrin, pyrethrins, citronella, pyrethroids, neem oil and mixtures thereof. When esbiothrin, d-allethrin, prallethrin, transfluthrin, bioallethrin, esbioallethrin, pyrethrins, and mixtures thereof are used, typically they will be in an amount of from 0.01 to 0.6 % w/w, preferably to 0.02 to 0.3 % w/w, most  
15 preferably 0.04 to 0.1 % w/w. When pyrethroids, neem oil, citronella and mixtures thereof are used, typically they will be in an amount of from 0.01 to 10 % w/w, preferably to 0.01 to 6 % w/w, most preferably 0.04 to 6 % w/w.

Emanation of the pesticide into the atmosphere occurs as a result of the pesticide being volatilised as the coil burns. At the front or tip of combustion of a coil, the  
20 temperature may be 200-500°C. However, behind the tip, the temperature will be somewhat lower owing to the insulation properties of the pulp. This means that compounds such as esbiothrin which boil at 160-170°C will be volatised and released into the atmosphere behind the burning tip.

The pulp may include an accelerant, being an alkali earth metal nitrate or nitrite  
25 in an amount of from 0.04 to 1.83 % w/w. Preferably, the alkali earth metal nitrate or nitrite will be included in an amount of from 0.20 to 1.20 % w/w, most preferably about 1.11 % w/w. The nitrates or nitrites that may be used include sodium, potassium, calcium, magnesium and mixtures thereof. It is preferred to utilise potassium as the nitrate or the nitrite, preferably as the nitrate.

30 As an alternative to the alkali earth metal nitrate or nitrite, the pulp may include an alkali earth carbonate or bicarbonate in an amount of from 0.02 to 1.83 % w/w.

Preferably the alkali earth metal carbonate or bicarbonate will be included in an amount of from 0.10 to 1.00 % w/w, most preferably about 0.82 % w/w. The carbonates or bicarbonates that may be used include sodium, potassium, calcium, magnesium and mixtures thereof.

- 5 It is preferred to use potassium carbonate.

Sodium silicate may be included in the pulp in an amount of from 0.01 to 1.37 % w/w. Preferably, the sodium silicate may be included in an amount of from 0.10 to 0.70 % w/w, most preferably about 0.56 % w/w.

- 10 A phosphate in an amount of from 0.01 to 0.40 % w/w and selected from the group consisting of diammonium phosphate, monoammonium phosphate, triammonium phosphate and mixtures thereof may be included in the pulp. Preferably the phosphate may be included in an amount of from 0.02 to 0.40 % w/w, most preferably about 0.14 % w/w. Furthermore, of these phosphates, diammonium phosphate is preferred.

- 15 A boron compound in an amount of from 0.01 to 0.92 % w/w and selected from the group consisting of boric acid, sodium tetraborate hydrous, sodium borate, potassium borate, calcium borate, zinc perborate, boronatocalcite and mixtures thereof may be included in the pulp. Preferably the boron compound may be included in an amount of from 0.10 to 0.70 % w/w, most preferably about 0.66 % w/w. Furthermore, of these boron compounds, sodium borate is preferred.

- 20 It is within the scope of this invention to include a perfume and/or a dye. Both the perfume and the dye, if included, will be selected on the basis of satisfying specific organoleptic requirements. It will of course be appreciated that the perfume must be suitably stable under the conditions of combustion of the coil.

- 25 The thickness and width of the pulp are of great importance in determining the burn rate of the coil. It is desired to have a coil which has a low burn rate as less mass is required in the coil. In a preferred embodiment, the structural element is made from moulded pulp, with dimensions of 3-10mm wide by 1-6mm thick, preferably 6mm wide and 4mm thick. The desired length is from 500 to 1500mm, preferably 1100mm. The cross-sectional combustion area is shaped in a rectangle, triangle, square, half-circle, u section or combinations thereof. Where the coil is a single helical coil, the  
30 weight of the single coil is 8 to 20 grams, preferably 12 grams.



It has been found that the density of the pulp is also of importance. To achieve appropriate burn times, the pulp has a density of 300-1000kg/m<sup>3</sup>, preferably 400-600kg/m<sup>3</sup>, most preferably 600kg/m<sup>3</sup>. Low densities burn too rapidly, while high densities have difficulty sustaining combustion. A density of about 600kg/m<sup>3</sup> is preferred as the relatively high density provides rigidity to the coil and ensures that the coil does not need to be too large in size. Coils with a density over 600kg/m<sup>3</sup> will sustain combustion by adding accelerants to the pulp. However, the use of accelerants increases the burn rate of the coil.

Other components that may be added to the pulp or applied as a coating after the product has dried include binders, dewatering agents, chemicals to increase the wet and dry strength of the product, starches, for example, Tapioca, Tamarind and corn; gums, for example, guar, arabic and xanthan; talc, and glues, for example, PVA. Typically, starch is present in an amount of from 5 to 15% w/w. All other components mentioned may be present in amounts of less than 1% w/w.

Broadly speaking, the various materials to be included in the pulp may be either incorporated during the preparation of the pulp, applied as a coating after the moulded pulp product has been formed or both incorporated and applied as a coating. It is preferable that the materials are applied as a coating after the forming of the moulded product.

When a coating is applied, it is important to note that certain of the materials cannot be dissolved in the same solution for coating purposes due to an incompatibility of ingredients. For example, the alkali earth metal nitrate or nitrite and the sodium silicate may be dissolved in the same aqueous solution. Likewise, the alkali metal carbonate or bicarbonate and the sodium silicate; the alkali metal nitrate or nitrite and the phosphate and the alkali metal nitrate or nitrite may each be dissolved in the same aqueous solution.

Whilst the aforementioned materials may be applied as aqueous solutions, the one or more pesticides and the perfume are not generally water soluble. Accordingly, either or both of these materials may be added to the aqueous solution of the other materials along with an emulsifier to ensure that they are uniformly dispersed.

Alternatively, they may be dissolved in a solvent and separately applied either before or after the aqueous coating(s).

The inclusion of a dye is optional and depending on the selected dyes solubility may be incorporated in an aqueous solution or in a suitable solvent for separate  
5 addition as a coating. If it is incorporated in a non-aqueous solvent, then preferably the solvent will be chosen to dissolve the perfume and the one or more pesticides.

If the dye is incorporated as an aqueous solution, it may be thickened with a suitable thickening agent such as guar gum to form a paste so as to allow application by painting or rolling.

10 It therefore follows that to apply all of the materials as a coating, a plurality of coatings are required. In such circumstances, drying may be carried out to remove excess water between each coating.

Alternatively, all coatings may be sequentially applied and the resultant coated moulded pulp product dried.

15 Typically the coat weight before drying will be in the range of from 5 to 240  $\text{gm}^{-2}$ , preferably 5-50  $\text{gm}^{-2}$ . In those instances where all of the materials are applied as a coating, the coat weight is most preferably 30-50  $\text{gm}^{-2}$ .

Application of the coatings may occur using techniques such as rolling, painting, printing or spraying. Naturally, the materials must be dissolved or dispersed in a liquid  
20 that is capable of application, desirably to obtain a uniform coating. If printing is used, well known techniques such as offset printing, gravure printing and lithographic printing may be used.

When produced as mosquito coils, the products of the invention may burn typically for up to 24 hours. By adjusting parameters such as the density, thickness,  
25 width and mass of coil, various burn times may be obtained. For example, burn times of at least 4 hours, preferably 7-8 hours may be obtained. It will also be appreciated that the amount of the various additives such as the alkali earth metal nitrate or nitrite, the sodium silicate, the phosphate and the boron compound will affect burn time.

#### Brief Description of the Drawings

30 Figure 1 is a graph showing the effect of width and thickness on the burn rate of the product with a density of  $380 \pm 25 \text{ kg/m}^3$ .

Figure 2 is a graph showing the effect of width on burn rate of three different products with a density of  $450 \pm 50\text{kg/m}^3$ .

Figure 3a is a plan view of the moulding apparatus of Example 1

Figure 3b is a sectional view A-A of Figure 3a.

- 5 Figure 4 is a view of the vacuum apparatus used in conjunction with the moulding apparatus.

In order to better understand the nature of the invention, a number of examples will now be described.

#### Example 1

- 10 As shown in Figure 3b the moulding apparatus 10 comprises four metal components 11,12,13 and 14. The components are a support plate 11, overlaid by a stainless steel mesh screen 12, a suction mould 13, and a press tool 14. Mesh screen 12 is fixed to the mould 13 using fasteners at location 15 in a manner such that the screen is sandwiched between support plate 11 and mould 13.
- 15 In use, the mould 13 is placed into a vacuum vessel 16 containing water 17 which is connected to a vacuum pump 18 by a vacuum hose 19 as shown in Figure 4. A 0.5% pulp solution was made by dispersing old newspaper in water with no additives. The pulp solution was poured into the mould 13 and the pressure was reduced to between 3 and 50kPa (abs) using a vacuum pump. Once the pulp solution had all been added and
- 20 sufficiently dewatered the press tool 14 was pressed down into the mould 13 as is best seen in Figure 4. This further dewatered the pulp and was found to produce samples of relatively consistent quality that had a density of about  $300\text{kg/m}^3$ . The moulding apparatus 10 was then dismantled and the pulp strips removed and dried in an oven at  $65^\circ\text{C}$ . To achieve densities greater than  $300\text{kg/m}^3$ , the pulp strips were placed back in
- 25 the mould 13 after drying and compressed between the press tool 14 and the support plate 11 using a hydraulic press. Old newspaper was found to sustain combustion at densities below  $600\text{kg/m}^3$  without the need for accelerants.

#### Example 2

- 30 Trials were conducted to compare the effect on burn rate when the thickness, width and density of the strips were altered. Strips were produced of lengths between 4-9mm,

with a thickness of 2,3,4 and 5mm at densities of 300,450 and 600kg/m<sup>3</sup>. These strips were then burnt to determine their mass burn rate in g/h.

Figure 1 shows the effect of varying thickness and widths on burn rate.

The observed trends were that increasing width increases burn rate, and increasing  
5 thickness increases burn rate.

Figure 2 shows the effect on the burn rate of the product with a density of 450 ± 50kg/m<sup>3</sup> when an accelerant (KNO<sub>3</sub>) is added to newspaper pulp and also when using white office paper instead of old newspaper as the main ingredient.

### Example 3

10 Trials were conducted to compare the effect on burn rate when white office paper was used as the main ingredient and also when the accelerant potassium nitrate (KNO<sub>3</sub>) was used with old newspaper. KNO<sub>3</sub> was added at a concentration of 0.125% in the pulp solution. Figure 2 shows that using white office paper as a raw material increases the burn rate dramatically. Likewise the addition of KNO<sub>3</sub> to old newspaper slightly  
15 increases the burn rate compared to old newspaper with no additives.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as  
20 illustrative and not restrictive.

## CLAIMS:

1. A combustible pesticidal product comprising a structural element formed of a vacuum moulded pulp of organic fibrous material, cellulose fibres, wood free fibres, or mixtures thereof, the product including one or more pesticides,  
5 which product on combustion emanates the pesticide into the atmosphere.
2. A combustible pesticidal product as in claim 1 wherein the product is formed of a thermoformed pulp.
3. A combustible pesticidal product as in claim 2 wherein the product is  
10 thermoformed at a temperature of between 80 to 400°C, and at a pressure of between 50 to 1500kPa.
4. A combustible pesticidal product of claim 3 wherein the product is thermoformed at a temperature of 250°C.
5. A combustible pesticidal product of claim 3 wherein the product is  
15 thermoformed at a pressure of between 200 to 600kPa.
6. A combustible pesticidal product of claim 4 wherein the product is thermoformed at a pressure of 400kPa.
7. A combustible pesticidal product as in any one of the preceding claims wherein the product comprises either incorporating into the wet pulp during its preparation  
20 and/or applying to a pulp as a coating thereof at least one of the following:  
an alkali earth metal nitrate or nitrite in an amount of from 0.04 to 1.83% w/w, an alkali earth carbonate or bicarbonate in an amount of from 0.02 to 1.83% w/w;  
sodium silicate in an amount of from 0.01 to 1.37% w/w;  
a phosphate in an amount of from 0.01 to 0.40% w/w and selected from the group  
25 consisting of diammonium phosphate, monoammonium phosphate, triammonium phosphate and mixtures thereof;  
a boron compound in an amount of from 0.01 to 0.92% w/w and selected from the group consisting of boric acid, sodium tetraborate hydrous, sodium borate, potassium borate, calcium borate, zinc perborate, boronatrocalcite and mixtures thereof; and  
30 optionally  
a perfume and/or dye.

8. A method for making a moulded combustible pesticidal product as claimed in claim 1 in which the one or more pesticides are insecticides, preferably esbiothrin, d-allethrin, prallethrin, transfluthrin, bioallethrin, esbioallethrin, pyrethrins, citronella, pyrethroids, neem oil and mixtures thereof.
- 5 9. A combustible pesticidal product as claimed in claim 8 wherein the one or more pesticides are selected from the group consisting of esbiothrin, d-allethrin, prallethrin, transfluthrin, bioallethrin, esbioallethrin, pyrethrins, citronella, pyrethroids, neem oil and mixtures thereof and are in an amount of from 0.01 to 0.6% w/w.
10. A combustible pesticidal product of claim 9 wherein the pesticides are present in  
10 an amount of from 0.02 to 0.3% w/w.
11. A combustible pesticidal product of claim 10 wherein the pesticides are present in an amount of from 0.04 to 0.1% w/w.
12. A combustible pesticidal product as claimed in claim 9 wherein the one or more insecticides are selected from the group consisting of pyrethroids, neem oil, citronella  
15 and mixtures thereof and are in an amount of from 0.01 to 10% w/w.
13. A combustible pesticidal product of claim 12 wherein the insecticides are present in an amount of from 0.01 to 6% w/w.
14. A combustible pesticidal product of claim 13 wherein the insecticides are present in an amount of from 0.04 to 6% w/w.
- 20 15. A combustible pesticidal product as in any one of claims 7 to 14 wherein the alkali earth metal nitrate or nitrite is included in an amount of from 0.20 to 1.20% w/w.
16. A combustible pesticidal product of claim 15 wherein the alkali earth metal nitrate or nitrite is included in an amount of 1.11% w/w.
17. A combustible pesticidal product as in any one of claims 7 to 15 wherein the  
25 nitrates and nitrites are selected from the group consisting of sodium nitrite, sodium nitrate, potassium nitrite, potassium nitrate, calcium nitrite, calcium nitrate, magnesium nitrite, magnesium nitrate and mixtures thereof.
18. A combustible pesticidal product as in any one of claims 7 to 17 wherein the alkali earth metal carbonate or bicarbonate is in an amount of from 0.01 to 1.00% w/w.
- 30 19. A combustible pesticidal product of claim 18 wherein the alkali earth metal carbonate or bicarbonate is present in an amount of about 0.82% w/w.

20. A combustible pesticidal product as in claim 18 wherein the carbonates or bicarbonates are selected from the group consisting of sodium carbonate, sodium bicarbonate, potassium carbonate, potassium bicarbonate, calcium carbonate, calcium bicarbonate, magnesium bicarbonate, magnesium carbonate and mixtures thereof.
- 5 21. A combustible pesticidal product as in any one of claims 7 to 20 wherein the sodium silicate is included in an amount of from 0.01 to 0.70% w/w.
22. A combustible pesticidal product of claim 21 wherein the sodium silicate is included in an amount of about 0.56% w/w.
23. A combustible pesticidal product as in any one of claims 7 to 22 wherein the  
10 phosphate is included in an amount of from 0.02 to 0.40% w/w.
24. A combustible pesticidal product of claim 23 wherein the phosphate is included in an amount of 0.14% w/w.
25. A combustible pesticidal product as in claim 23 wherein the phosphate is diammonium phosphate.
- 15 26. A combustible pesticidal product as in any one of claims 7 to 25 wherein the boron compound is included in an amount of from 0.10 to 0.70% w/w.
27. A combustible pesticidal product as in claim 26 wherein the boron compound is included in an amount of 0.66% w/w.
28. A combustible pesticidal product as in any one of the preceding claims wherein  
20 the thickness of the pulp product is from 1mm to 6mm.
29. A combustible pesticidal product as in claim 28 wherein the thickness of the pulp product is 4mm.
30. A combustible pesticidal product as in any one of the preceding claims wherein the width of the pulp product is from 3mm to 10mm.
- 25 31. A combustible pesticidal product as in claim 30 wherein the width of the pulp product is 6mm.
32. A combustible pesticidal product as in any one of the preceding claims wherein the length of the pulp product is from 500 to 1500mm.
33. A combustible pesticidal product as in claim 32 wherein the length of the pulp  
30 product is 1100mm.

34. A combustible pesticidal product as in any one of the preceding claims wherein the density of the pulp product is from 300 to 1000kg/m<sup>3</sup>.
35. A combustible pesticidal product as in claim 34 wherein the density of the pulp product is from 400 to 600kg/m<sup>3</sup>.
- 5 36. A combustible pesticidal product as in claim 35 wherein the density of the pulp product is 600kg/m<sup>3</sup>.
37. A combustible pesticidal product as in any one of the preceding claims wherein the product has a cross-sectional combustion area shaped in a rectangle, triangle, square, half-circle, u section or combinations thereof.
- 10 38. A combustible pesticidal product as in any one of the preceding claims wherein the organic fibrous materials, cellulose fibres and wood free fibres include but are not limited to waste paper and cardboard, old newspaper, kraft pulp, coconut powder, straw, bagasse, bamboo, cane, straw, grasses, weeds, tea leaves, charcoal powder, sawdust, cotton, cloth and rags, and husks of materials including rice, wheat and
- 15 coconuts.
39. A combustible pesticidal product as claim 7 wherein the coating is applied to the pulp by rolling, painting, printing or spraying.
40. A combustible pesticidal product as in any one of the preceding claims wherein other components can be added to the pulp or applied as a coating.
- 20 41. A combustible pesticidal product as in claim 40 wherein the components can include binders, dewatering agents, chemicals to increase the wet and dry strength of the product, starches, gums, talc and glues.
42. A combustible pesticidal product as in any one of the preceding claims wherein the product is a mosquito coil having a burn time of at least 4 hours.
- 25 43. A combustible pesticidal product as in claim 42 wherein the mosquito coil has a burn time of 7-8 hours.
44. A combustible pesticidal product as in claim 42 wherein the coil is shaped as a single helical coil, double coil, triangular, hexagon, polygon, rectangular or other configurations.
- 30 45. A combustible pesticidal product as in claim 44 wherein the coil is a single helical coil and the weight of the single coil is 8 to 20 grams.



46. A combustible pesticidal product as in claim 45 wherein the weight of the single coil is 12 grams.
47. A method of making a combustible pesticidal product comprising the steps of:  
forming a pulp of organic fibrous material, cellulose fibres, wood free fibres, or  
5 mixtures thereof,  
the addition of one or more pesticides, and  
moulding the product by vacuum moulding  
to form a combustible pesticidal product.
48. A method of making a combustible pesticidal product as in claim 47 wherein the  
10 product is formed at a vacuum pressure of 0-20kPa.
49. A method of making a moulded combustible pesticidal product substantially as  
hereinbefore described with reference to the Examples 1 and 2.
50. A method of making a moulded combustible pesticidal product substantially as  
hereinbefore described with reference to the accompanying Figures 3a, 3b and 4.
- 15 51. A combustible pesticidal product when made according to the method of  
claim 47.

FIG. 1


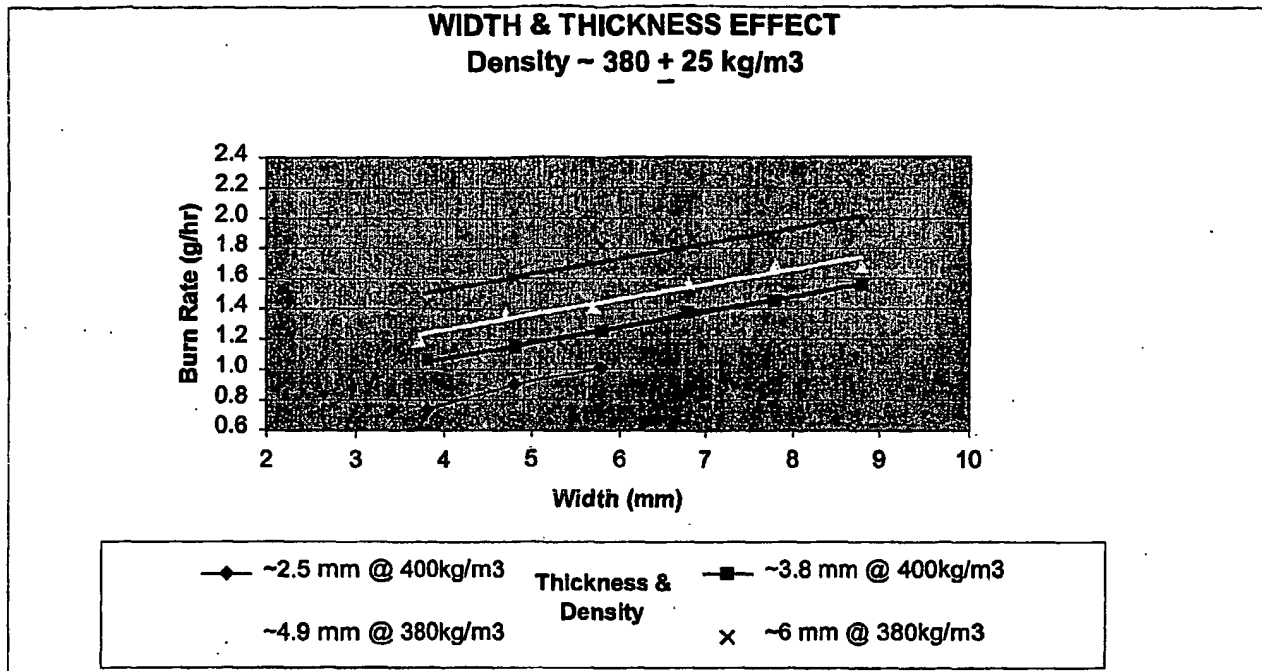


FIG. 2

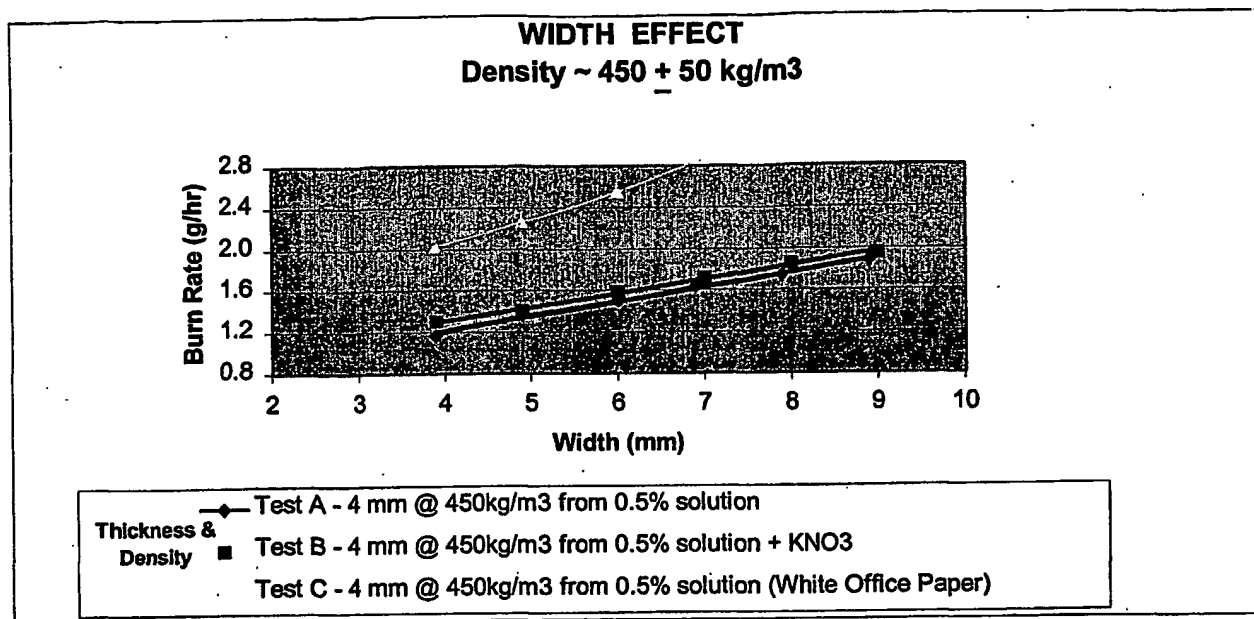

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/02938

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A01N25/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A01N A01M D21J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CH 295 917 A (GEIGY AG J R) 31 January 1954 (1954-01-31) -----	
A	GB 2 262 231 A (CHOU HOWARD ;YAP MIN CHEONG (MY)) 16 June 1993 (1993-06-16) -----	
A	US 5 447 713 A (ELSNER THOMAS ET AL) 5 September 1995 (1995-09-05) -----	
A	WO 02 11537 A (BOSWORTH MARGARET LEE ;RECKITT BENCKISER AU PTY LTD (AU); RECKITT) 14 February 2002 (2002-02-14) -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

20 November 2003

Date of mailing of the international search report

02/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel: (+31-70) 340-2040, Tx. 31 851 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Decorte, D

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/02938

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
CH 295917	A	31-01-1954	NONE	
GB 2262231	A	16-06-1993	CN JP	1073069 A 5271003 A
				16-06-1993 19-10-1993
US 5447713	A	05-09-1995	DE BR CN IT JP MX ZA	4209921 A1 9301329 A 1076828 A MI930516 A1 6116105 A 9301403 A1 9302158 A
				30-09-1993 05-10-1993 06-10-1993 27-09-1993 26-04-1994 01-09-1993 23-11-1993
WO 0211537	A	14-02-2002	AU CN WO GB	7647301 A 1446046 T 0211537 A1 2365339 A
				18-02-2002 01-10-2003 14-02-2002 20-02-2002